



*BEST INTERNATIONAL*

*Valve Hardware Catalog*

[www.beico.com](http://www.beico.com)



**For Small Rim Hole (0.453")**

Part #	Effective Length
GR-412	7/8"
GR-413	1-1/4"
GR-414	1-1/2"
GR-418	2"
GR-423	2-1/2"



**For Rim Hole (0.625")**

Part #	Effective Length
GR-415	1-1/4"
GR-425	2"

**Chrome Sleeve Snap In Valve For Small Rim Hole (0.453")**

Part #	Effective Length
GR-412C	7/8"
GR-413C	1-1/4"
Chrome Sleeve For Snap in Valve	
SL-1P	For 413
SL-4	For 412



**Rubber Snap In Valve Stem for Tire Pressure Monitoring Systems**

Part #	Effective Length
GR-413-TP	1-1/4"
GR-418-TP	2"
GR-HP600-TP	1-1/4"



**Tubeless Snap In Type Valves For High Pressure Applications**

For Use to 100 PSI Cold Inflation Pressure Maximum

Part #	Effective Length	Hole Size
GR-HP600	1-1/4"	0.453"
GR-HP602	2"	0.453"
GR-HP801	1-1/4"	0.625"
GR-HP802	2"	0.625"
GR-HP600C	1-1/4"	0.453"



### High Performance Metal Stem



Part #	Description	Effective Length
GR-5991B	Chrome Metal Stem With Hi-Temp Core	1.23"
GR-416	Nickel Plated Metal Stem With Hi-Temp Core	1.45"
GR-416-L	Nickel Plated Metal Stem With Hi-Temp Core	2.00"
VS-8	Chrome Metal Stem, Inner Mount w/ Hi-Temp Core	0.69"
VS-8+7	Chrome Metal Stem, Inner Mount w/ Hi-Temp Core	0.97"
TV-8-45	Chrome Metal Stem, Inner Mount, 45 Degree	1.5"
TV-8-90	Chrome Metal Stem, Inner Mount, 90 Degree	1.5"
VS-UC6	Flush Mount Metal Stem (2 Stems, 1 Filler Tube)	—
VS-5	Chrome Metal Stem, Outer Mount, Slotted Bottom	1.5"
VS-5-45	Chrome Metal Stem, Outer Mount, 45 Degree	2.16"
VS-5-90	Chrome Metal Stem, Outer Mount 90 Degree	2.25"
GR-430	Motorcycle Stem Grommet Seal, Fits 0.327" Valve Hole	1"
HP-600-NK	Outer Mount with 30 Degree Bend -Nickel	2"
HP-600-M	Outer Mount with 30 Degree Bend -Brass	2"

### High Performance Metal Stem

Part #	Description	Effective Length
GR-416CS	Outer Mount Metal Stem With Metal Sleeve	1.35"
GR-416M	Outer Mount Stem w/ Metal Sleeve (No Grommet)	1.25"
GR-525S	Outer Mount Stem With Small Metal Sleeve	1.45"
GR-525M	Outer Mount Stem With Medium Metal Sleeve	1.45"
GR-525L	Outer Mount Stem With Large Metal Sleeve	1.45"




### Metal Valve Stems for Tire Pressure Monitoring Systems



Part #	Description
GR-5991B-TP	Chrome Metal Stem With TPMS Adaptor
GR-416-TP	Nickel Plated Metal Stem With TPMS Adaptor
VS-8-TP	Enkei Style Inner Mount Stem With TPMS Adaptor.




### Accessories for Snap-In Valve Stems



Part #	Description	Finish
A-Cap	Std Dome Hex	Chrome
A-Cap L	Long Hex	Chrome
E-Cap	Flat Top Hex	Chrome
F-Cap	Dome	Nickel
G-Cap	Large Dome Cap	Nickel
P-Cap	Plastic Dome	Plastic
P-Cap Gr	Plastic Dome Green	Plastic
C Cap	Screwdriver Cap	Nickel
D Cap	Large Dome Cap	Nickel
J Cap-A	Double Seal Cap	Nickel

### Rubber Grommets

Part #	Valve Hole	Used On
RG-39	0.625"	5991B, 416
RG-54	0.453"	5991B, 416
RG-15	0.625"	500-575
RG-15S	0.625"	500-575
RG-46	0.625"	509-510-511

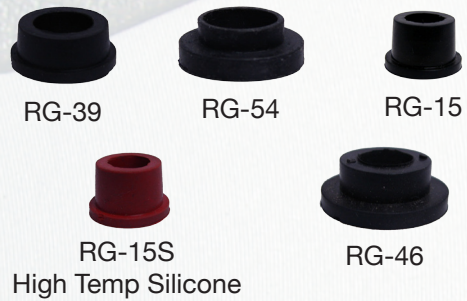

### Washers

Part #	Finish	Used On
TR RW-8	Nickel	500-575
TR RW-8B	Brass	500-575
TR RW-13	Chrome	5991B, 416



### Hex Nuts

Part #	Used On
TR HN-4	5991B, 416, 6008 A/B



### Hex Nuts


Part #	Thread	Used On
TR HN-13	0.406"-26	500-575



### Stainless Steel Hex Nuts

Part #	Valve Hole	Used On
TR HN-17	0.406"-26	509-510-511



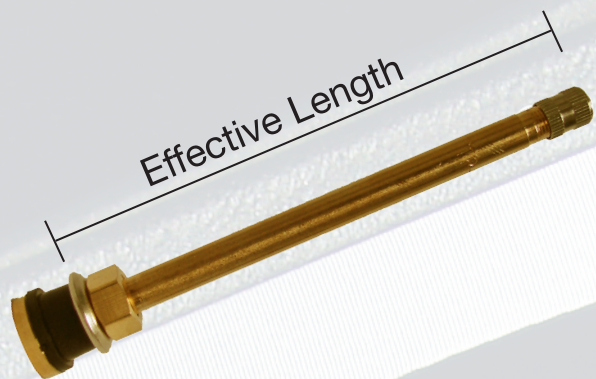

### Truck & Bus Tubeless Tire Valve

Part #	Effective Length
GR-500	2.00"
GR-501	1.50"
GR-570	3.13"
GR-571	3.38"
GR-572	3.75"
GR-573	4.38"
GR-574	5.00"
GR-575	1.13"

### Straight Brass Valve For 0.625" Rim Hole

Part #	Eff. Length	Bend Degree
GR-500/1147	2.00"	13 Degree
GR-570-13	3.13"	13 Degree



500/1147

570-13

### For Wheel with Oval Valve Hole

Part #	Effective Length
GR-501 OVH	1.50"



501 OVH

### Tubless Valves for Aluminum Disc Wheels 509 Series

Use In Drop Center ALUMINUM Disc Wheels With 5/8" Bottom Valve Hole.

Part #	Effective Length
GR-509	4.75"
GR-510	5.50"
GR-511	4.25"




511

509

510

### Metric Rim Hole Valve (9.7 MM Valve Hole)


Part #	Bend Length	Bend Degree
V3 20-1	0	0
V3 20-5	1.5625"	27
V3 20-7	2.00"	27
V3 20-4	2.375"	27
V3 20-6	3.375"	27

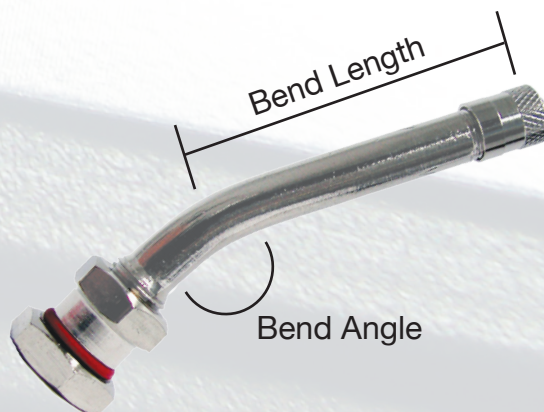

## Truck Tubeless Valves GR-540 Series (0.328" Rim Hole)

Designed Specially For Use In ALUMINUM Wheel.  
Designed For Use With 0.328" Rim Hole


Part #	Eff. Length	Bend Length	Bend Angle
GR-542	1.25"	-	-
GR-543	2.31"	-	-
GR-543C	2.31"	1.38"	45
GR-543D	2.31"	1.38"	60
GR-543E	2.31"	1.38"	75
GR-544	2.86"	-	-
GR-544D	2.86"	1.94"	60
GR-544E	2.86"	1.94"	75
GR-545	3.50"	-	-
GR-545D	3.50"	2.62"	60
GR-545E	3.50"	2.62"	75
GR-546	4.29"	-	-
GR-546D	4.29"	3.35"	60
GR-546E	4.29"	3.35"	75
GR-546-36	4.29"	3.35"	36
GR-547	4.7"	-	-
GR-547D	4.7"	3.78"	60

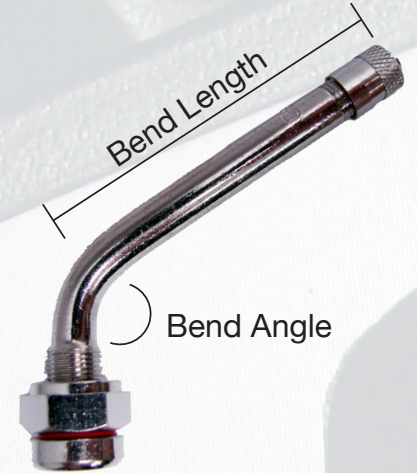

540 Series

## Truck Tubeless Valves GR-550 Series

Part #	Eff. Length	Bend Length	Bend Angle
GR-552	1.25"	-	-
GR-553C	2.31"	1.38"	45
GR-553D	2.31"	1.38"	60
GR-553E	2.31"	1.38"	75
GR-554D	2.86"	1.94"	60
GR-555D	3.50"	2.62"	60
GR-555E	3.50"	2.62"	75
GR-556D	4.29"	3.35"	60

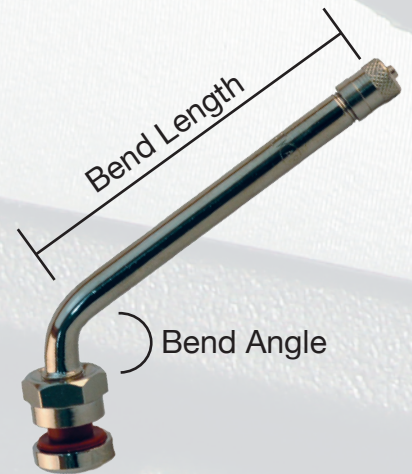

550 Series

### O-Ring for 540 and 550 Series

Part #	Thread	Used On
RG-60-01	0.328"	540 Series
RG-70	0.328"	550 Series




540 Series



550 Series

### Hex Nuts

Part #	Used On
TR-HN-21	540 Series
TR-HN-22	550 Series



540 Series



550 Series

### Truck Valve Stems for Tire Pressure Monitoring Systems

Part #	Description
TP-5-90-25	Truck Metal Stem, 90 Degree, 2-1/2" Eff Length. For TPMS
TP-5-90-30	Truck Metal Stem, 90 Degree, 3" Eff Length. For TPMS



### STANDARD BORE AIR-LIQUID / AGRICULTURAL VALVES

These Clamp-in valves have a removable CH3 Core Housing to permit fast filling of tires with liquid ballast solution. Fit 0.625 Valve Holes

Part #	Description
GR-618A	Clamp In Valve Stem With CH-3 Housing
TR CH-3	CH-3 Housing with Hi Temp Core
GR-6008A	Tractor Front Wheel Valve - 2 Grommets, 1 Nut
GR-6008B	Tractor Front Wheel valve - 1 Grommet, 2 Nuts
GR-621A	0.625" Hole, Bend - 65 degrees, Bent Length - 2-5/16"
GR-622A	0.625" Hole, Bend - 90 degrees, Bent Length - 3 -7/8"
GR-623A	0.625" Hole, Bend - 65 degrees, Bent Length - 1-19/32"



618A



621A



6008A



6008B



GH-3

## Large Bore Air-Liquid / Agricultural Valves

### TR-F910-B Tubeless Air Liquid Valve

Converts super large bore valve to standard bore for agricultural use. Consists of TR-CH-16 Core Housings and TR-SP-8 Tubeless Spud

#### Components

#### TR-CH-16 Core Housing

Features O-Ring seal, includes valve core

Metal Cap: Metal Dome shaped top

#### TR-SP8B Tubeless Spud

### TR-L870 Tubeless Air Liquid Valve


Consists of TR-CH-8 Core Housing and TR-CH-8 Tubeless Spud

#### Components

#### TR-CH-8 Core Housing

Features O-ring seal and flats on body for wrench tightening. Includes core and screwdriver cap. For use with TR-SP-8B Spud for air-liquid applications.

#### TR-SP-8B Tubeless Spud

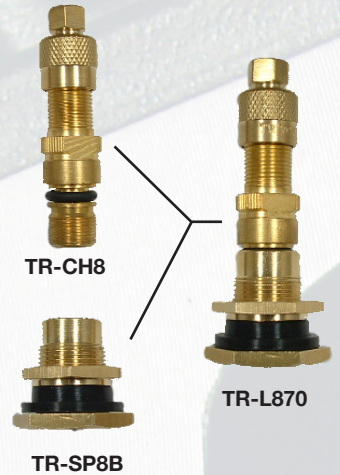

## LARGE BORE TUBELESS VALVES ASSEMBLIES AND ACCESSORIES

### TR-J670 Tubeless Tire Valve

This valve consists of the TR-SP-2 Tubeless Valve Spud and the TR-J670 Stem Assembly.

#### Components

#### TR-J670C Valve Stem Assembly

Has O-Ring Seal; includes large bore valve core and valve cap

#### TR-SP-2 Tubeless Spud



### TUBELESS-SINGLE BEND, SWIVEL VALVES

This valve has removable stems and O-ring seal. Stem swivels to any convenient position for air service. Hex nut permits wrench tightening to lock stem assembly in position after installation. Bend angle is 80 degrees.

No. For Complete Valve	Spud Only	Stem Assembly Only	Effective Length (Inches)
J650C	SP-2	J650	3-1/8"





### Hex Nuts

Part #	Thread	Used On
TR HN-1	0.485"	618A, 621A, 622A, 623A
TR HN-15	0.6875"	SP-2



TR HN-1



TR HN-15

### Rubber Grommets

Part #	Thread	Used On
RG-7	0.625"	618A, 621A-623A, 622A
RG-22	0.8125"	SP-2



RG-7



RG-22

### AIR LIQUID VALVE EXTENSION

Part #	Bend Angle
AL-EXT65	65 Degrees
AL-EXT90	90 Degrees



EXT90



EXT65

### Washers

Part #	Thread	Used On
TR-RW-11	0.485"	618A, 621A-623A, 622A



### ACCESSORIES FOR LARGE BORE AND AIR LIQUID VALVE

Part #	Used On
TR-VC-6	Screwdriver Valve Cap, Fits 0.482"-26 Valve Threads
TR-VC-7	Hex Valve Cap, Fits 0.482" -26 Valve Threads
TR C-2	LargeBore Core (Short) Fits 0.305"-32 Thread
TR-AD-01	Adapts Large Bore Down To Standard Bore 0.485"-26 (Valve Core Threads)
TR-AD-02	Adapts Large Bore Down To Standard Bore 0.305"-35 (Valve Cap Threads)
TR-RN 5/8"	Rim Hole Plug, Used to Seal 5/8" Rim Hole
TR-LN--10/100	Nylon Rim Nuts Fits over TR-618A
TR-LN-10B/100	Brass Rim Nuts Fits over TR-618A



VC-6



VC-7



C-2



AD-02



AD-01



RN-5/8"



LN-10B



LN-10

### DEPTH GAUGE

Part #	Description
DG-1	Tire Tread Depth Gauge




## REPAIR TOOLS

Part #	Used On
2 IN 1	2 In 1 Valve Tool for Standard Bore
4 IN 1	4 Way Valve Tool For Standard Bore
FT-01	Cable Type Valve Fixing Tool
FT-02	Chain Type Valve Fixing Tool
VP-01	Big Yank Snap On Valve Puller
CR-01	Screwdriver Core Remover
CR-02	Standard & Large Bore Core Remover


2 IN 1



4 IN 1



FT-01



FT-02



CR-01

VP-01



CR-02

## STITCHERS, RUBBER SCRAPERS AND SKIVING KNIVES

Part #	Description
AB-T000	Skiving Knife, Flexible Round Point (Wood Handle)
AB-N256	1-1/2" x 1/8" Wood Handle Ball Bearing Roller Stitcher
AB-N257	2" x 1/4" Wood Handle Ball Bearing Stitcher
AB-T003	Rubber Scraper
AB-T004	Inner Liner Rubber Scraper



AT-T000



AB-N256



AB-T004



AB-T003



### Nut Puller

Part #	Description
NP-01	Standard Nut Puller

## TIRE REPAIR TOOLS


Part #	Description
AB-671AM	Metal T-Handle Insert Needle
AB-671BM	Metal T-Handle Tire Reamer
AB-671BL	Plastic T-Handle Tire Reamer (Long)
AB-RT001	Plastic Screwdriver Type Handle Tire Probing Awl



## TRUCK EXTENSIONS (ALL WITH 1/2 INCH COLLAR AND DOUBLE NUT)

Core Type, 4 way Guided, Rigid Truck Valve Extension

Part #	Effective Length
AB-502C	1-3/8"
AB-503C	2-1/8"
AB-504C	3"
AB-505C	4"
AB-506C	4-3/8"
AB-507C	5"
AB-508C	6"

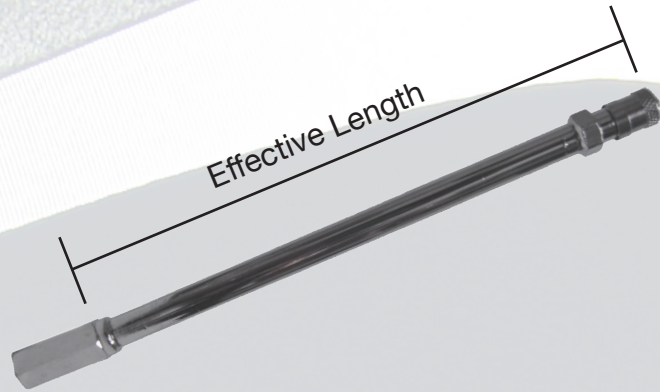

## RECREATIONAL VEHICLE EXTENSION

Part #	Description
VE-7 STL	7" Flexible Extension With Stainless Steel Mesh Protection
VE-10 STL	10" Flexible Extension With Stainless Steel Mesh Protection
VE-RE7	7" Rubber Hose Flexible Extension
VE-RE9	9" Rubber Hose Flexible Extension
VE-FS7	7" Braided Straight End Teflon Tube Flexible Extension
VE-FB7	6-1/4" Braided Bend End Teflon Tube Flexible Extension
VE-FS9	9" Braided Straight End Teflon Tube Flexible Extension
VE-FB9	8-1/4" Braided Bend End Teflon Tube Flexible extension
VE-F12S	14" Braided Straight End Teflon Tube Flexible Extension
VE-F12B	13-1/4" Braided Bend End Teflon Tube Flexible Extension



VE-10 STL



VE-RE7



VE-RE9

## STEEL WHEEL WEIGHTS

Steel Wheel Weights - Stick On Type

Available in zinc coating only or zinc coated with baked lacquer.

Part #	Description
SW1412A	Zinc Coated with Baked Lacquer, 1/4 oz Strips, 48 Pieces per Box
SW1206A	Zinc Coated with Baked Lacquer, 1/2 oz Strips, 48 Pieces per Box
SW-1412AZ	Zinc Coated, 1/4 oz Strips, 48 Pieces per Box
SW-1206AZ	Zinc Coated, 1/2 oz Strips, 48 Pieces per Box



**CLIP ON WHEEL WEIGHTS AVAILABLE SOON**



18424 Mt. Langley Street  
Fountain Valley • California, 92708  
TEL: 714-593-3400 • FAX: 714-593-6363  
[www.beico.com](http://www.beico.com)