

# CL Challenger Lifts



**Model#: SRM10**  
10,000 lb. capacity  
Short-Rise Lift

## SRM10

The SRM10 is a great choice for brake and tire servicing needs. Dual hydraulic cylinders provide a 10,000 lb. lifting capacity picking up vehicles ranging from small passenger cars to light trucks.

Standard 2 position spotting blocks and auxiliary adapters reach a wide range of vehicle pick up points. Lug nuts and other small parts are always within reach with the SRM10's inset storage trays. Its small footprint compared to other lift models make the SRM10 a perfect fit.

## Features & Benefits:

- Challenger Lifts' SRM10 short-rise pad lift comes standard with 4 two position adapter blocks and 4 spotting block auxiliary adapters for increased vehicle spotting versatility
- Standard storage trays are conveniently placed on each side of the lift to prevent lug nuts and other small parts from being misplaced
- Dual cylinders provide stable 10,000 lb. lifting capabilities to accommodate a wide range of vehicles
- Floor mounted diamond plated approach ramps help to prevent slipping
- 3 locking positions allows technician to work at their ergonomic working height to increase productivity and minimize fatigue
- Powder coat finish provides long lasting durable finish

### standard features:



4 two position adapter blocks included  
Part#: SR10-001



### optional accessory:



Four 1/8" spotting block auxiliary adapters  
Part#: 63100

For more information, contact your Authorized Challenger Lifts Distributor:

SRM10	Specifications
Lifting Capacity	10,000 lb. (4536kg)
<b>A</b> Raised Height	22" (559mm)
Lowered Height	4 1/4" (108mm)
Locking Bar Heights	13 13/16", 18 3/8", 21 1/4" (351mm, 467mm, 540mm)
<b>B</b> Low Adapter Position	4 3/4" (121mm)
<b>C</b> High Adapter Position	6 3/4" (171mm)
<b>D</b> Overall Width	7' 1" (2159mm)
<b>E</b> Outside Width of Platforms	72" (1829mm)
<b>F</b> Width between Platforms	23" (584mm)
<b>G</b> Platform Overall Length	50" (1270mm)
<b>H</b> Ramp & Platform Overall Length	77 3/4" (1975mm)
<b>I</b> Overall Length	90 1/2" (2299mm)
Rearward Movement	13 1/4" (337mm)
Motor	1HP, Single Phase, 60Hz
Voltage	115v

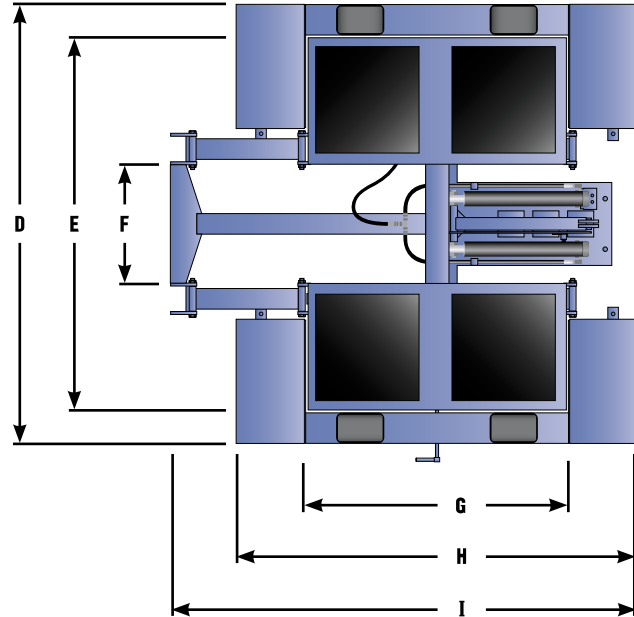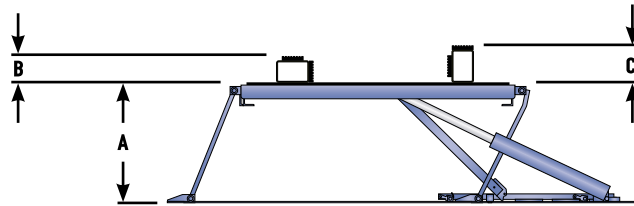

The Automotive Lift Institute (ALI) certifies that the SRM10 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and is Third Party Validated by the ETL Testing Laboratory.



CHALLENGER LIFTS, INC.  
200 Cabel Street  
Louisville, Kentucky 40206

Phone Toll-Free: 800-648-5438  
502-625-0700

Fax: 502-625-0711

E-mail: sales@challengelifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.